Metamark
DS-400
Premium Heavyweight Roller Banner Stand

Specifications

Finished Graphic Panel Size
2300 (h) X 800 (w)mm
(includes 200mm bleed)

Visual Graphic Size
2100 (h) X 800 (w)mm (10mm of graphic
hidden by top gripping hanger.)

Recommended Media
Metamark MD-RU170 / MD-RU160

Maximum Finished Graphic Panel Thickness
250 micron

Assembled Size
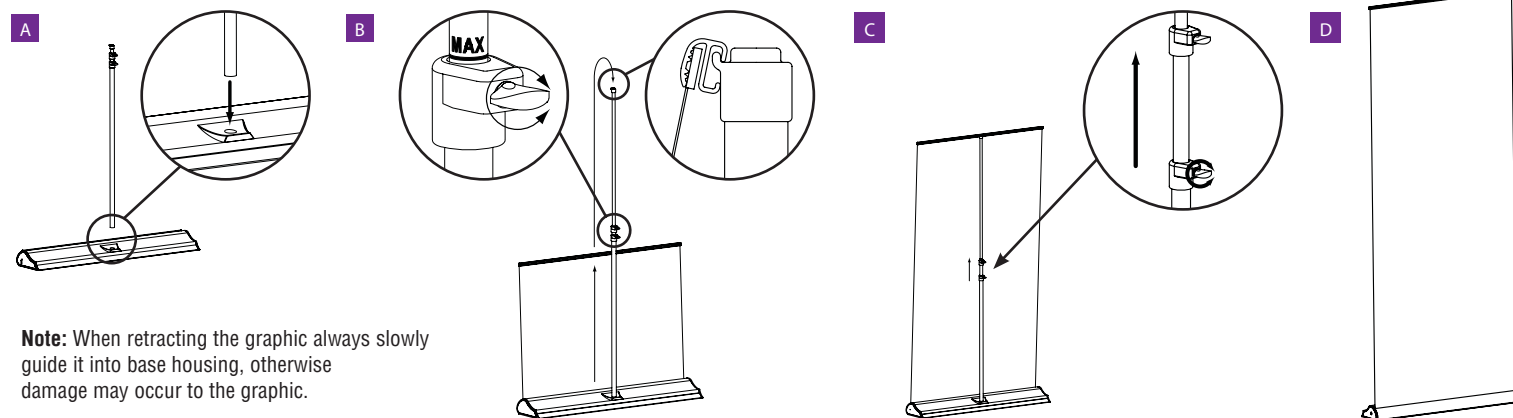2175 (h) X 820 (w) X 180 (d)mm

Weight
4.5kg

Components List
DS-400 unit
3 part telescopic pole
Graphic hanger with self adhesive strip
Carry bag
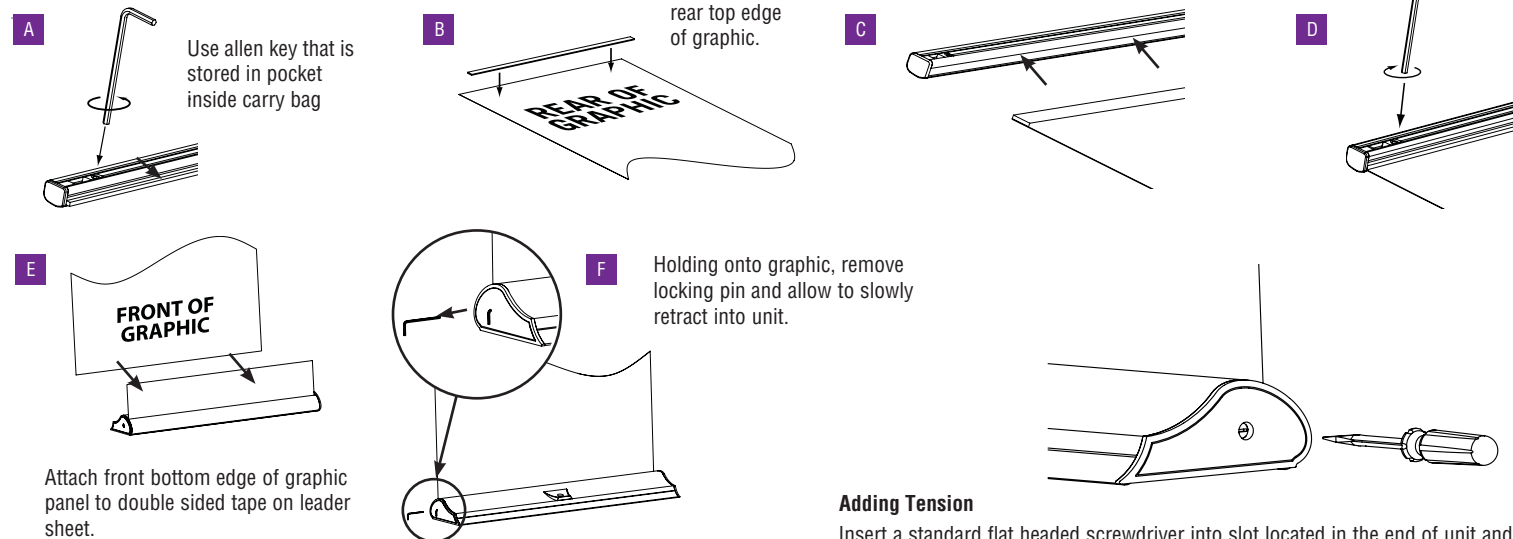
Warranty:
2 years from date of purchase.
This covers product failure due to
manufacturing defects only.

METAMARK
The Materials Company

Assembly Instructions

A
B
MAX
C
D

Note: When retracting the graphic always slowly guide it into base housing, otherwise damage may occur to the graphic.

Graphic Attachment

A — Use allen key that is stored in pocket inside carry bag

B — REAR OF GRAPHIC

Attach self-adhesive hanging strip to rear top edge of graphic.

C

D

E — FRONT OF GRAPHIC

Attach front bottom edge of graphic panel to double sided tape on leader sheet.

F — Holding onto graphic, remove locking pin and allow to slowly retract into unit.

Note: To ensure a proper bond between graphic and double sided tape pressure must be applied. The adhesive should be allowed to cure for 24 hours before tension is applied.

Adding Tension
Insert a standard flat headed screwdriver into slot located in the end of unit and turn clockwise to add extra graphic tension.

Removing Tension
To un-tension graphic panel place a flat headed screwdriver into the slot and push to disengage ratchet. Hold in and turn anti-clockwise until tension in spring is released. To remove graphic panel carefully peel it off leader sheet. The graphic hanger can also be removed.