Assembly Instructions

Metamark DS-400 Premium Heavyweight Roller Banner Stand

Specifications

Finished Graphic Panel Size 2300 (h) X 800 (w)mm (includes 200mm bleed)

Visual Graphic Size

2100 (h) X 800 (w)mm (10mm of graphic hidden by top gripping hanger.)

Recommended Media Metamark MD-RU200 / MD-RU330

Maximum Finished Graphic Panel Thickness 250 micron

Assembled Size 2175 (h) X 820 (w) X 180 (d)mm

Weight 4.5kg


Components List

DS-400 unit 3 part telescopic pole Graphic hanger with self adhesive strip Carry bag

Warranty:

2 years from date of purchase. This covers product failure due to manufacturing defects only.



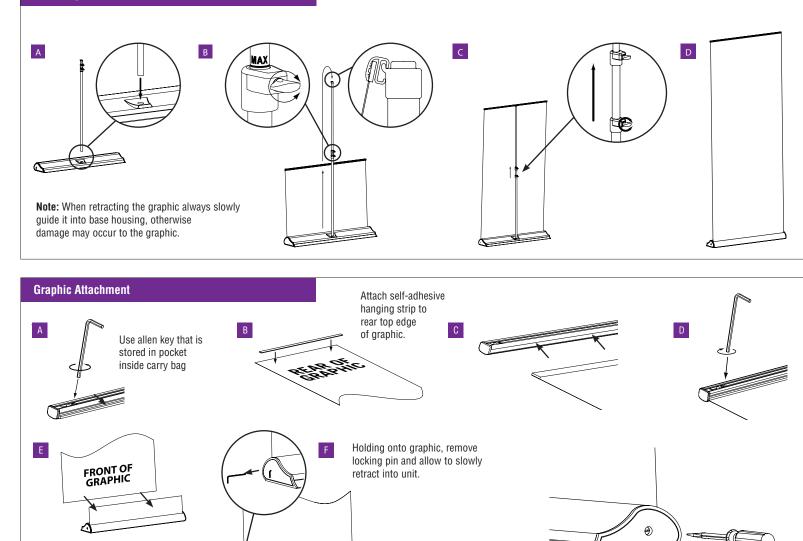

Adding Tension

Insert a standard flat headed screwdriver into slot located in the end of unit and turn clockwise to add extra graphic tension.

Removing Tension

To un-tension graphic panel place a flat headed screwdriver into the slot and push to disengage ratchet. Hold in and turn anti-clockwise until tension in spring is released. To remove graphic panel carefully peel it off leader sheet. The graphic hanger can also be removed.

Note: To ensure a proper bond between graphic and double sided tape pressure must be applied. The adhesive should be allowed to cure for 24 hours before tension is applied.

Attach front bottom edge of graphic panel to double sided tape on leader

sheet.