Choose Metamark

Metamark materials are trusted by the world's leading producers of signs and graphics. They are specified by leading brands' managers and are insisted on when looking for quality and value.

Technical Leadership

Our class leading manufacturing, selection and conversion control processes guarantee the highest standard of quality, technical compatibility and consistency. Metamark's technical leadership is delivered as standard with every product we sell.

Customer Satisfaction and Value

We build relationships and we're prepared to listen, so we ensure our products and services better reflect your needs and technical requirements. We manage every element of your experience in working with us, from product performance to state of the art order processing.



MetaTex

Heat Transfer Flex for Textiles

For the latest pricing, application guides and technical support, visit www.metamark.co.uk

For all sales enquiries or to request a sample, contact us at: UK: 0345 345 5645 • Email: sales@metamark.co.uk International: +44 (0)1524 387 132 • Email: internationalorders@metamark.co.uk

Metamark (UK) Limited

Metamark House, Genesis Business Park, Woking, GU21 5RW, UK Luneside, New Quay Road, Lancaster, LA1 5QP, UK

Warranty: Metamark (UK) Limited warrants to its customers that completed decorative markings which utilise Metamark SignVinyl will remain in good condition without excessive fading or colour degradation for the specified life time of each material when correctly stored and applied in accordance with procedures outlined in the technical literature. The data is given in good faith to provide an indication of the performance of the product. Purchasers should consider the suitability of each product for its intended use and the purchaser assumes all risks in connection with such use. Seller shall not be liable for damages in excess of the product nor for incidental nor consequential loss.


Performance you can trust

Metamark MetaTex

Heat Transfer Flex for Textiles

MetaTex is a high quality heat transfer flex, for garment markings, such as promotional T-shirts, sportswear and workwear, as well as textile banners. The high quality polyurethane film has a matt, reflection-free surface with a thermally activated adhesive. It is suitable for transfer to cotton, polyester and polyester / acrylic blend fabrics. It benefits from being highly flexible, and the low tack self adhesive liner allows easier cutting and weeding. It is machine washable up to 60°C.

MetaTex – Heat Transfer Flex for Textiles

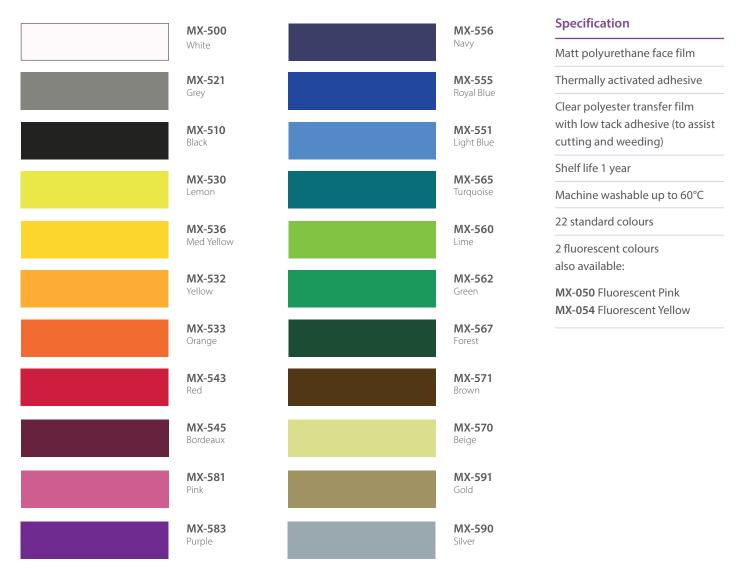

Application

Reverse cut the film using a 45° blade. Once weeded, the product can be applied to the textile using a heat transfer press, applying pressure through the polyester liner. Remove the liner immediately after pressing, when the film is still hot, and then press again for 2 seconds. Always perform a test on the textile first.

	Temperature	Time	Pressure
Cotton	165-175°C	20-25 sec	High
Cotton / Polyester (Mix)	165-175°C	20-25 sec	High
Polyester / Acrylic (Mix)	160-170°C	15-20 sec	Medium